Relatatata



# WELCOME TO THE NEW INDUSTRY STANDARD

# FIBER OPTIC PATCHCORDS


**Instrumentation & Network Interconnects** 

#### ONE METER PATCHCORDS

- SC. LC. FC and ST
- · APC and UPC ferrule finishes
- Length of 1m
- Hybrid cable available
- 3mm Up-jacket

#### **APPLICATIONS**

 Interface test instruments such as OTDR's and OPM's to fiber under test

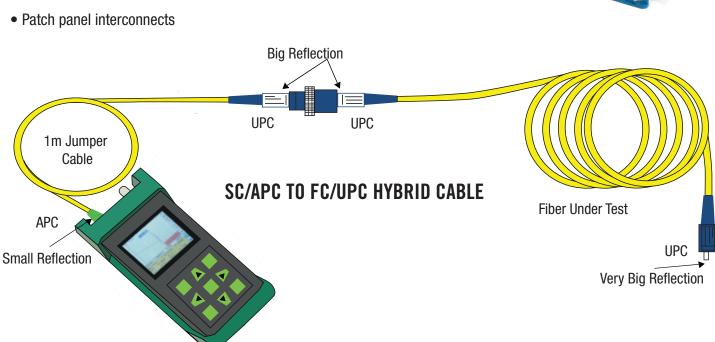

#### **BENEFITS**

- Protects the bulkhead finish of the test instrument from contamination and possible damage when connecting to cables and connectors with an unknown level of damage and/or contamination.
- If the 1m jumper becomes damaged it can be thrown away and replaced. If the OTDR bulkhead becomes damaged the repair cost is very high for replacement or re-polishing. The OTDR then does not need to be sent back to the factory and remains in use.
- A hybrid 1m jumper can be used so that any type of field connector can be connected to the test instrument.

## **SPECIFICATIONS**

Fiber Type	G.652D (SM), G.651D (MM)
Insertion Loss	Typcically <0.1dB per connector; Max <0.3db (Per Connector)
Length	1m
<b>GR-326 Compliant</b>	Yes
IEC61300-3-35 Compliant	Yes

## ORDERING INFORMATION

CAT NO.	UPC NO.
SCUPC-SCUPC	03251
FCUPC-FCUPC	03252
STUPC-STUPC	03257
SCPC-SCPC	03271
FCPC-FCPC	03272
STPC-STPC	03273
SCPC-SCPC/50	03274
FCPC-FCPC/50	03275
STPC-STPC/50	03276

CAT NO.	UPC NO.
SCAPC-SCAPC	03278
FCAPC-FCAPC	03279
SCUPC-SCAPC	03280
SCUPC-LCAPC	03282
SCUPC-LCUPC	03285
SCAPC-LCAPC	03286
SCAPC-LCUPC	03288
FCUPC-FCAPC	03289
FCUPC-LCUPC	03301

CAT NO.	UPC NO.
FCUPC-LCAPC	03305
FCAPC-LCAPC	03307
FCAPC-LCUPC	03308
SCUPC-FCAPC	03309
SCAPC-FCUPC	03371
SCPC-FCPC	03372
SCPC-FCPC/50	03373







