


LP6 - 6 Ton Hydraulic Crimper/Cutter



GREENLEE®

UTILITY

A Textron Company

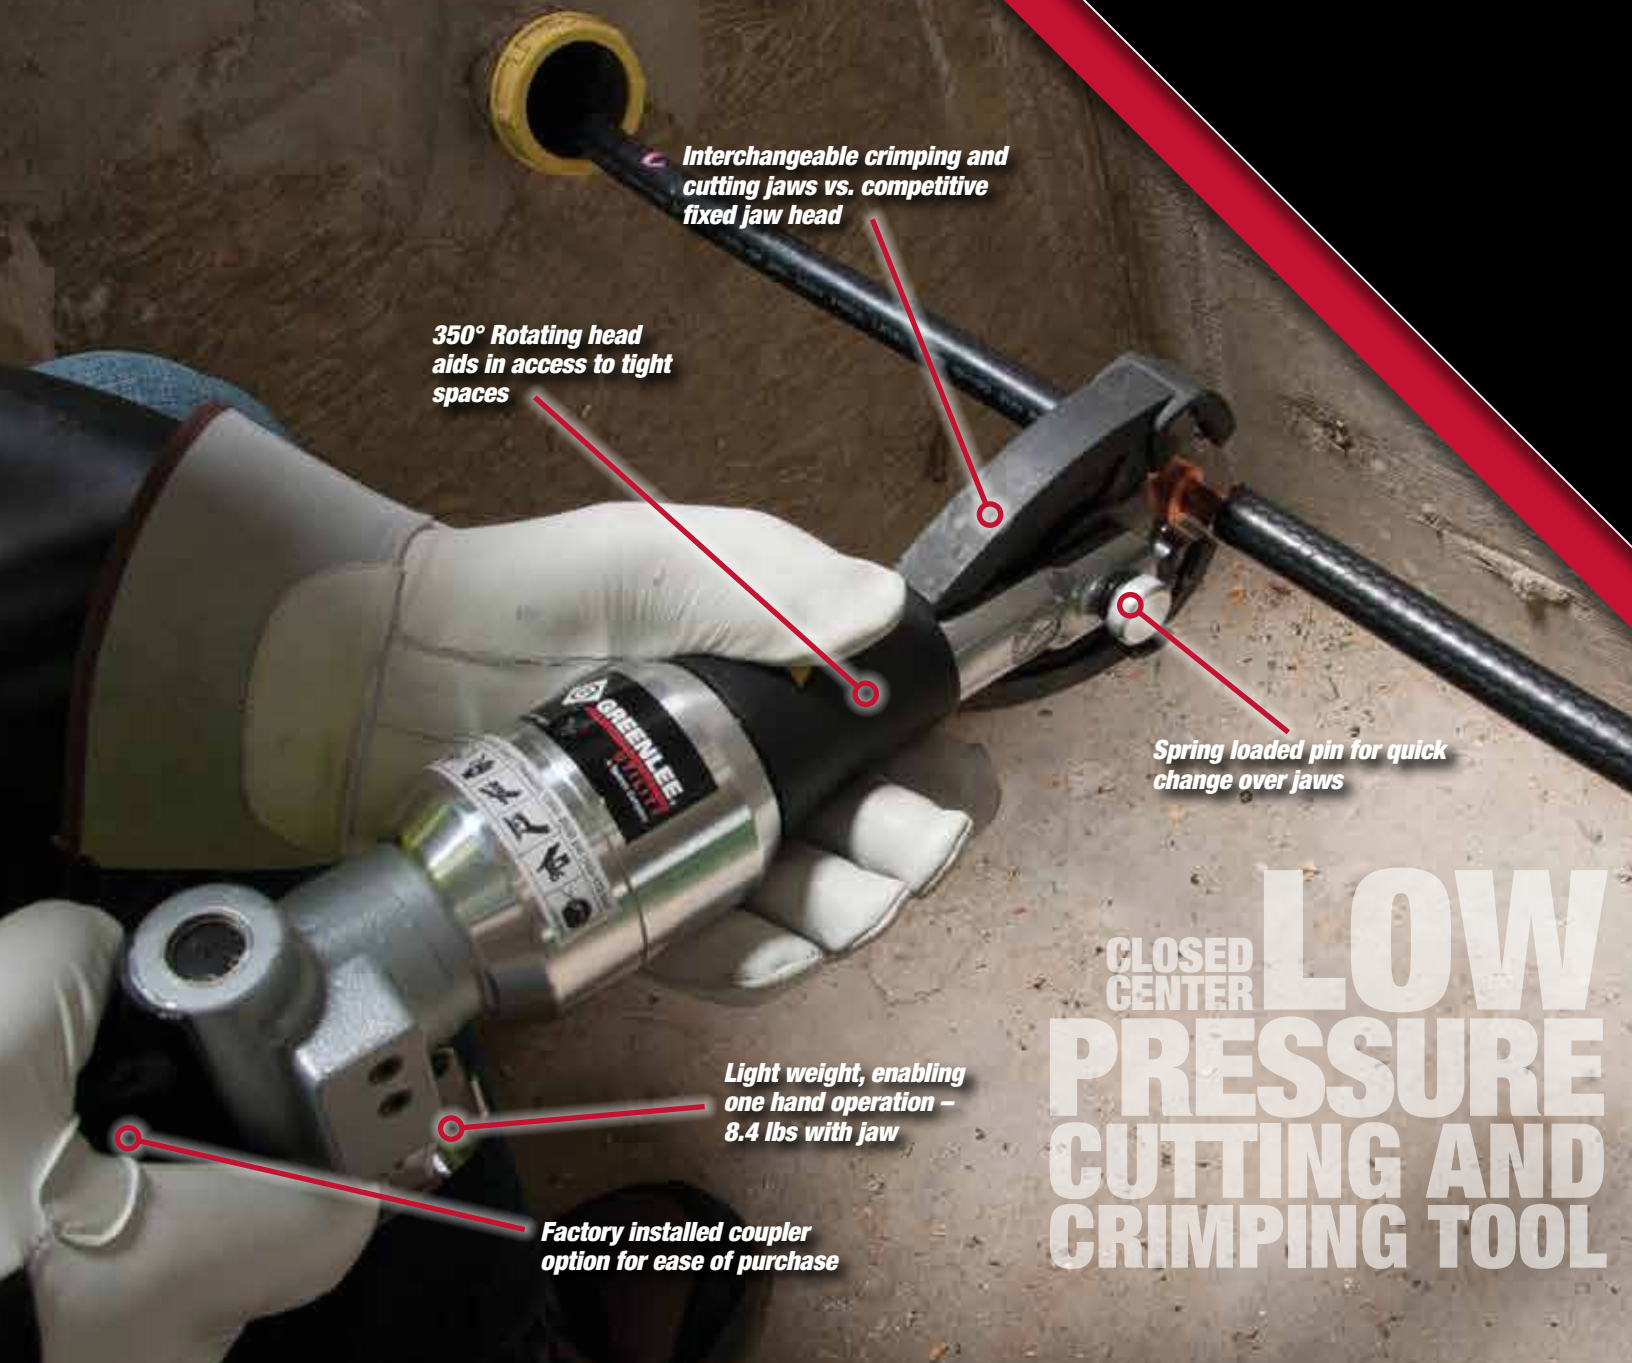

Interchangeable crimping and cutting jaws vs. competitive fixed jaw head

350° Rotating head aids in access to tight spaces

Spring loaded pin for quick change over jaws

Light weight, enabling one hand operation - 8.4 lbs with jaw

Factory installed coupler option for ease of purchase

CLOSED CENTER LOW PRESSURE CUTTING AND CRIMPING TOOL

Improved Usability

- *22% less weight versus existing competitive models*

Platform Versatility

- *Incorporates the same crimping and cutting jaws as Greenlee battery platform EK425L and EK628L*

Simplified Customizing

- *Available with or without couplers installed from the factory.*
- *Can be ordered bare or with the specified crimping or cutting jaw included.*

www.greenleeutility.com

DIES FOR USE WITH SERVICE ENTRANCE CONNECTORS, C-TAPS, H-TAPS, OVERHEAD AND UNDERGROUND CONNECTORS

(Use with EK245L with CJD3, CJD3BG & CJD30 jaws.
Use with EK425L with CJK jaws with F020735 adapters.)

"W"-STYLE DIES

CAT. NO.	UPC NO.	BURNDY NO.	CAT. NO.	UPC NO.	BURNDY NO.
KD6-10	10165	W-BG	KD6-18	10173	W-166
KD6-11	10166	W-O	KD6-19	10174	W-243
KD6-12	10167	W-C	KD6-20	10175	W-247
KD6-13	10168	W-K840	KD6-21	10176	W-249
KD6-14	10169	W-161	KD6-22	10177	W-164
KD6-15	10170	W-162	KD6-24	10179	W-237
KD6-16	10171	W-163	KD6-25	10180	W-239
KD6-17	10172	W-165	KD6-27	10182	W-28K



CRIMPING JAW COMPATIBILITY	BRAND	TYPE/SERIES
CJD3BG	Greenlee®	KD6 Series
CJD30	FCI Burndy®	W, X Series
CJD3	IlSCO®	ND Series
CJK*	Huskie® Panduit®	HT-58 Series CD-2001 Series
CJK	Kearney™	Dies for Type "O" tools
CJXPJ	Nicopress connectors	Connectors that require the X, P or J tool grooves

CUTTING JAW COMPATIBILITY

CJB	
	- One time disposable lock hasps 4 AWG Alumoweld - ACSR 1/0 (Does not cut fully through all of the aluminum strands. The cable must be flexed to complete the separation).



Order Information

CAT NO.	UPC NO.	DESCRIPTION	JAW CONFIGURATION	COUPLERS
LP6-02	00817	6 Ton Hydraulic Crimping Tool - Bare - No Coupler - Closed Center	Bare	No
LP6-04	00819	6 Ton Hydraulic Crimping Tool - Bare - Coupler - Closed Center	Bare	Yes
LP6-06	00822	6 Ton Hydraulic Crimping Tool - CJD3BG - No Coupler - Closed Center	CJD3BG	No
LP6-08	00824	6 Ton Hydraulic Crimping Tool - CJD3BG - Coupler - Closed Center	CJD3BG	Yes
LP6-10	00826	6 Ton Hydraulic Crimping Tool - CJD30 - No Coupler - Closed Center	CJD30	No
LP6-12	00834	6 Ton Hydraulic Crimping Tool - CJD30 - Coupler - Closed Center	CJD30	Yes
LP6-14	00837	6 Ton Hydraulic Crimping Tool - CJD3 - No Coupler - Closed Center	CJD3	No
LP6-16	00840	6 Ton Hydraulic Crimping Tool - CJD3 - Coupler - Closed Center	CJD3	Yes
LP6-18	00842	6 Ton Hydraulic Crimping Tool - CJK - No Coupler - Closed Center	CJK	No
LP6-20	00848	6 Ton Hydraulic Crimping Tool - CJK - Coupler - Closed Center	CJK	Yes
CJD3	03242 R	Crimping Jaw with single D die groove	CJD3	N/A
CJD3BG	84515 R	Crimping Jaw Unit - D and BG die grooves	CJD3BG	N/A
CJD30	87514 R	Crimping Jaw Unit - D and O die grooves	CJD30	N/A
CJK	04829 R	Crimping Jaw Unit for Kearney "O" dies	CJK	N/A
CJ22	84511 A	Crimping Jaw for use with KC22 & KA22 crimping dies	CJ22	N/A
CJB	84513 A	Cutting Jaw for one-time disposable lock hasps	CJB	N/A
CJXPJ	84512 A	Crimping Jaw with Nicopress X, P, & J die grooves	CJXPJ	N/A
CP1	22041 A	Tool Pouch	N/A	N/A
F020735	43136 A	Kearney "D" crimping die (adapts jaws to use "W" & "X" dies)	F020735	N/A
KD6-27	10182 A	"W" style cutter dies for ACSR to 4/0 AWG	KD6-27	N/A
54923	54923 A	HTMA Male Coupler - 3/4 - 16SAE O-Ring external thread	N/A	N/A
54925	54925 A	HTMA Female Coupler - 3/4 - 16SAE O-Ring external thread	N/A	N/A

CONNECTOR CAPACITY

5/8" Service Entrance Connectors	10-1/0 AWG	All Aluminum Tension Splices	6-4/0 AWG
.840 Service Entrance Connectors	1/0-4/0 AWG	One Piece ACSR Tension Splices	4-1/0 AWG
Aluminum "H" Taps	6-4/0 AWG	Two Piece ACSR Tension Splices	2 AWG-477 kcmil
Copper "H" Taps	10-2 AWG	Aluminum Jumper Splices	4 AWG-266.8 kcmil
Copper Tension Splices	6-2/0 AWG	Stirrups	2-4/0 AWG

SPECIFICATIONS

Crimping Force	6 Tons (54 kN)
Length (with jaws)	20-1/2" (521mm)
Width (head open)	4-1/2" (114mm)
Weight (with jaws)	8.4 lbs (3.8kg)

DISTRIBUTED BY:

R = REPLACEMENT PART **A** = ACCESSORY

GREENLEE®
A Textron Company

www.greenlee.com • MA-5855 11/2012
4455 Boeing Drive • Rockford, IL 61109-2988 • USA • 815-397-7070
©2012 Greenlee Textron Inc. • An ISO 9001 Company • Printed in USA
Greenlee Textron Inc. is a subsidiary of Textron Inc.

USA
Tel: 800.435.0766
Fax: 800.451.2632

CANADA
Tel: 866.384.8813
Fax: 800.524.2653

INTERNATIONAL
Tel: +1.815.397.7070
Fax: +1.815.397.9247

