

GREENLEE HYDRAULIC IMPACT SOLUTIONS

HW1 • HW1V • HW3 • HID6506



**LIGHTER
DESIGNS.
MORE
POWER.**



GREENLEE®

UTILITY

A Textron Company

HYDRAULIC IMPACT PRODUCTS


Designed for Professional Linemen

- Forward positioned handle for **improved balance** and reduced fatigue.
- Impact and heat-resistant **Cool Grip™ handle+** dissipates heat.
- Large **onboard lifting eye** for easy and secure storage.

Upgraded Performance

- Industry-leading **weight to torque ratio**.
- Quickly change between forward and reverse motions with **directional control selector**.
- Adjustable torque settings with **variable flow knob**.

HW1 IMPACT WRENCH HIGH TORQUE 1/2"

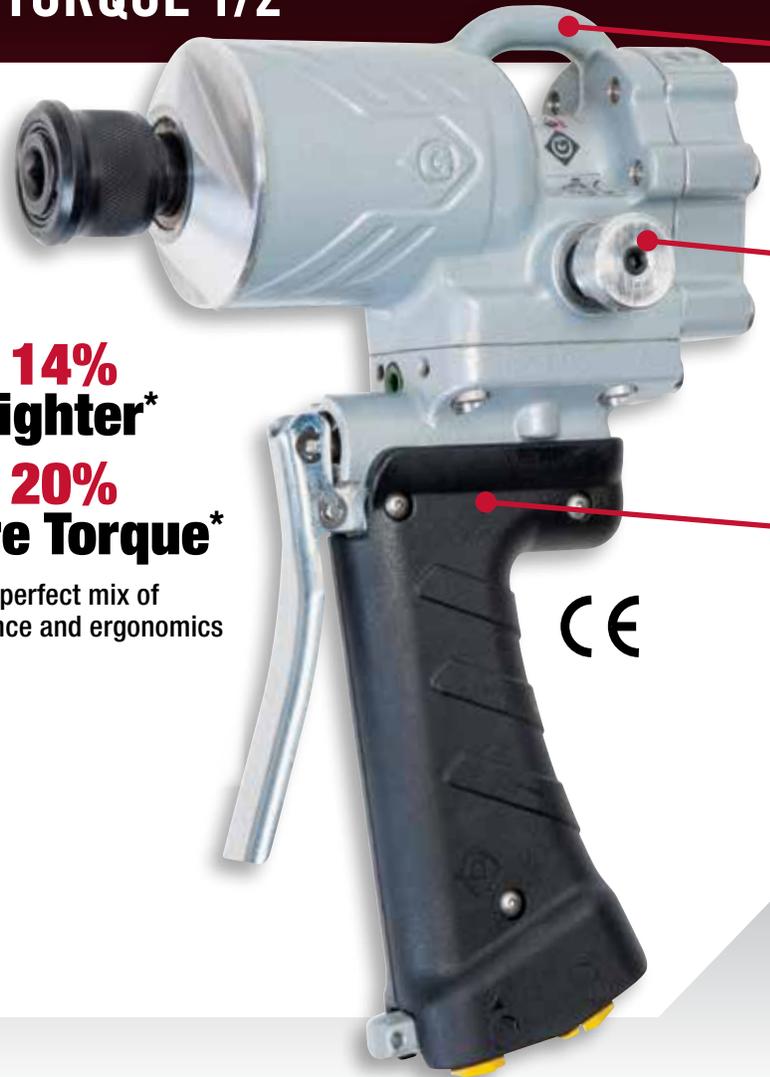

**14%
Lighter***

**20%
More Torque***

The perfect mix of
performance and ergonomics



Specifications HW1 & HW1V

Capacity	7/16" Hex
Weight	HW1 – 6.5 lbs. (2.93 kg) HW1V – 6.6 lbs. (2.97 kg)
Maximum Torque	500 ft. - lb. (677 Nm) at 8 gpm (30 lpm)
Minimum Torque	HW1 – 500 ft. - lb. (677 Nm) at 8 gpm (30 lpm) HW1V – 160 ft. - lb. (213 Nm) at 8 gpm (30 lpm)
System	Super Spool Selector Control
Length	8.2" (208 mm)
Width	4.2" (107 mm)
Height	11" (280 mm)
Flow Range	4 - 12 gpm (15 - 45 lpm)
Operating Pressure	1000 - 2500 psi (69 - 170 bar)
Pressure Port Thd.	9/16 - 18 SAE O-Ring
Return Port Thd.	3/4 - 16 SAE O-Ring



Torque selector for quick adjustments (HW1V only).

Lifting eye for safe storage

Forward/Reverse directional control

Cool Grip™ handle+



HW3 IMPACT WRENCH HIGH TORQUE 3/4" SQUARE DRIVE

**28%
Lighter***
**17%
More Torque***

Redesigned housing reduces weight, increases power.

Specifications HW3

Capacity	3/4" square
System	Super Spool Selector Control
Weight	10.5 lbs. (4.75 kg)
Length	9.3" (236 mm)
Width	4.2" (107 mm)
Height	11.8" (300 mm)
Flow Range	4 - 12 gpm (15 - 45 lpm)
Operating Pressure	1000 - 2000 psi (69 - 140 bar)
Torque	1283 ft. - lb. (1742 Nm) at 10 gpm (37.8 lpm)
Pressure Port Thd.	9/16 - 18 SAE O-Ring
Return Port Thd.	3/4 - 16 SAE O-Ring
RPM Range	2800 rpm at 8 gpm (30 lpm) (no load)

HID6506 ROTARY IMPACT HAMMER DRILL

**11%
More Blows per Minute***
**4X
Longer Life Expectancy***


New SDS-impact mechanism for larger holes

Specifications HID6506

Capacity	Concrete - 7/8" (22mm) hole Steel - 1/2" (13 mm) hole Wood - 1-1/8" (30 mm) hole Core Bit - 2-5/8" (68 mm)
System	Super Spool Selector Control
Chuck	SDS Plus bit shanks
Weight	9 lbs. (4.1 kg)
Length	11.2" (285 mm)
Width	3.5" (89 mm)
Height	11" (280 mm)
Flow Range	4 - 12 gpm (15 - 45 lpm)
Operating Pressure	1000 - 2000 psi (69 - 140 bar)
Pressure Port Thd.	3/4 - 16 SAE O-Ring
Return Port Thd.	3/4 - 16 SAE O-Ring
RPM Range	900 - 1050 rpm at 6 gpm (22.7 lpm)
Blows Per Minute	5400 at 6 gpm (22.7 lpm)

Hammer / Drill mode selector

Variable flow control

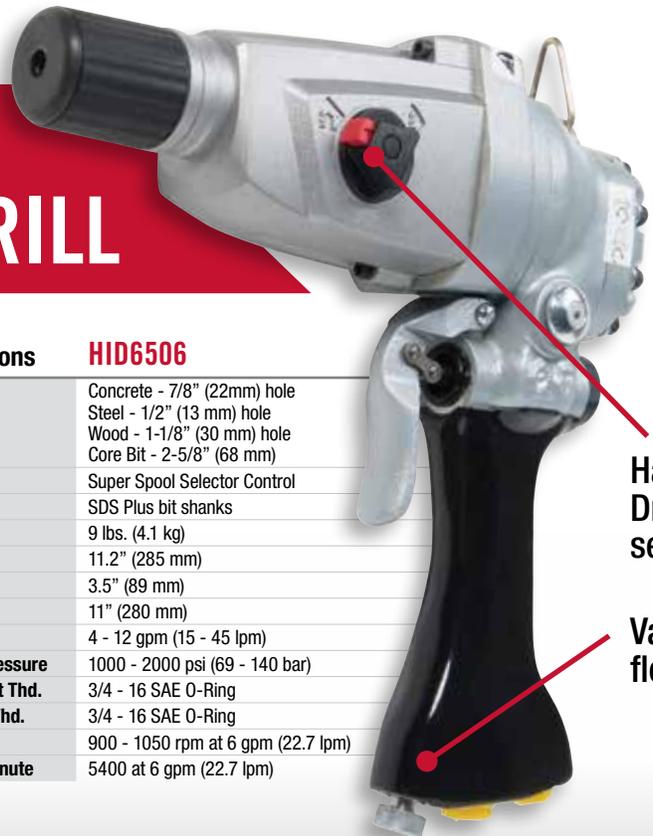

+ Patented design and other patents pending.

* Compared to previous model.

www.greenlee.com

FOR PRODUCT VIDEOS, DEMONSTRATIONS
AND MORE, SCAN THIS QR CODE OR VISIT:



www.youtube.com/GreenleeDEMO



GREENLEE®

UTILITY

A Textron Company

NUT RUNNERS




NAIL EATER® EXTREME BLACK AUGER BITS



Greenlee Nail Eater® Extreme Black Auger Bits drill fast and smooth through most treated woods, including tough utility poles.

- **Patented cutting edge** cuts through nails and staples with ease.
- **Teflon® coating** for maximum wear resistance and smooth operation.
- **Made in USA.**

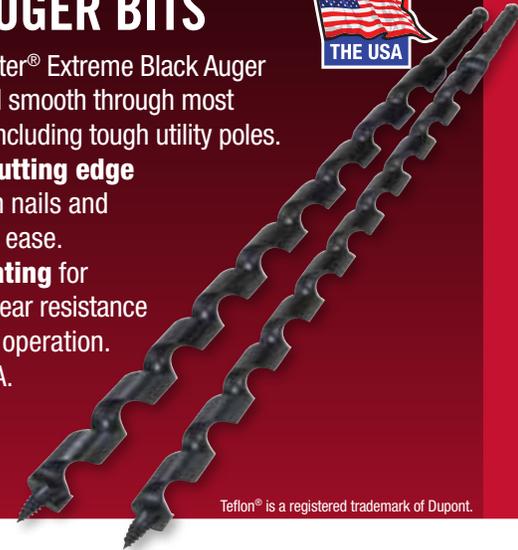

Teflon® is a registered trademark of Dupont.

ORDERING INFORMATION

CAT NO.	UPC NO.	DESCRIPTION
HW1	00373	High torque 1/2" impact wrench with 7/16" hex quick change chuck w/adaptor
HW1V	00372	High torque 1/2" impact wrench with torque adj, 7/16" hex quick change chuck w/adaptor
HW3	00990	High torque 3/4" impact wrench with 3/4" square drive with auxiliary handle
HID6506	42309	SDS Plus Rotary Impact Hammer Drill
AD1/2-5/8	00939	Heavy duty 5/8" hex x 1/2" square drive shank
NR1-5/8	00938	Heavy duty 5/8" hex x NR1 Nut Runner
21111-5/8	00950	Heavy duty 5/8" hex x NR2 Nut Runner
49314	49314	Heavy duty 7/16" hex x 1/2" square drive shank
49782	49782	Heavy duty 7/16" hex x NR1 Nut Runner
21111	21111	Heavy duty 7/16" hex x NR2 Nut Runner
135245	40887	Hose Assembly, 3/8" X 8' ORANGE 3/8" NPTF male fittings
135247	40888	Hose Assembly, 3/8" X 10' ORANGE 3/8" NPTF male fittings
25746	25746	Hose Assembly, 3/8" X 8' ORANGE 3/8" NPTF male swivel fittings
31369	31369	Hose Assembly, 3/8" X 8' ORANGE - 9/16"-18 SAE O-ring swivel / 3/4"-16 SAE O-ring swivel
54923	54923	HTMA Male Coupler: HTMA, 3/4-16 SAE O-Ring Exterior Thread
54925	54925	HTMA Female Coupler: HTMA, 9/16-18 SAE O-Ring Exterior Thread
00376	00376	Trigger guard kit for HW1 or HW1V, HW3

NUT RUNNERS

CAT NO.	UPC NO.	DESCRIPTION
NR1	45798	Nut Runner with adapter for 5/8", 1/2", 13/16", 1" square nuts
NR2	20920	Nut Runner with adapter for 1", 1-1/8", 1-5/16" square nuts

NAIL EATER AUGER BITS®

CAT NO.	UPC NO.	DESCRIPTION
37868	37868	Nail Eater II, 7/16" Hex Extreme Impact Bits - 9/16" Dia, 18" Length
37869	37869	Nail Eater II, 7/16" Hex Extreme Impact Bits - 11/16" Dia, 18" Length
37870	37870	Nail Eater II, 7/16" Hex Extreme Impact Bits - 13/16" Dia, 18" Length
37871	37871	Nail Eater II, 7/16" Hex Extreme Impact Bits - 15/16" Dia, 18" Length
66TF-9/16	02004	Nail Eater Extreme, 7/16 Hex Black Teflon Coated Impact Bits - 9/16" Dia, 18" Length
66TF-11/16	02005	Nail Eater Extreme, 7/16 Hex Black Teflon Coated Impact Bits - 11/16" Dia, 18" Length
66TF-13/16	02006	Nail Eater Extreme, 7/16 Hex Black Teflon Coated Impact Bits - 13/16" Dia, 18" Length
66TF-15/16	02007	Nail Eater Extreme, 7/16 Hex Black Teflon Coated Impact Bits - 15/16" Dia, 18" Length

www.greenlee.com MA-5938 rev. 06/13
4455 Boeing Drive • Rockford, IL 61109-2988 • USA • 815-397-7070
©2013 Greenlee Textron Inc. • An ISO 9001 Company • Printed in USA
Greenlee Textron Inc. is a subsidiary of Textron Inc.

